


FEATURES

- Nonpolar, high temperature.
- Suitable for use in polarity and change circuits.



SPECIFICATIONS

Item	Performance Characteristics								
Operating Temperature Range	-40 to +105°C								
Rated Working Voltage Range	6.3 to 100V								
Nominal Capacitance Range	2.2 to 1000μF								
Capacitance Tolerance	±20% at 120Hz, +20°C								
Leakage Current	$I \leq 0.03CV$ or 3 (μ A) whichever is greater measured after 5 minutes application of rated working voltage at +20°C								
$\tan \delta$ (120Hz, +20°C)	Working Voltage (V)	6.3	10	16	25	35	50	63	100
	$\tan \delta$ (max.)	0.26	0.24	0.22	0.20	0.16	0.14	0.12	0.10
Low Temperature Characteristics	Impedance ratio max. at 120Hz								
	Working Voltage (V)	6.3	10	16	25	35	50	63	100
	Z-25°C / Z+20°C	4	3	2	2	2	2	2	2
	Z-40°C / Z+20°C	8	6	4	4	3	3	3	3
High Temperature Loading	Test time	: 1,000 hours							
	Test temperature	: +105°C							
Shelf Life	Test conditions	: Rated DC working voltage to each polarity every 250 hours							
		Post test requirements at +20°C							
Industrial Standard	Leakage current	: \leq Initial specified value							
	Cap. change	: within ±20% of the initial measured value							
	$\tan \delta$: \leq 200% of the initial specified value							
JIS C - 5101-4 (IEC 60384-4)									

CASE SIZE TABLE

Safety vent for $\phi \geq 6.3$		Unit : mm																																																	
		<table border="1"> <thead> <tr> <th>ϕD</th><th>5</th><th>6.3</th><th>8 (L < 20)</th><th>8 (L ≥ 20)</th><th>10</th><th>12.5</th><th>16</th></tr> </thead> <tbody> <tr> <td>F</td><td>2.0</td><td>2.5</td><td>3.5</td><td>3.5</td><td>5.0</td><td>5.0</td><td>7.5</td></tr> <tr> <th>ϕd</th><td>0.5</td><td>0.5</td><td>0.5</td><td>0.6</td><td>0.6</td><td>0.6</td><td>0.8</td></tr> <tr> <th>α</th><td colspan="2">(L < 20) 1.5</td><td colspan="2">(L ≥ 20) 2.0</td><td colspan="2"></td><td colspan="2"></td></tr> <tr> <th>β</th><td colspan="2">(D < 20) 0.5</td><td colspan="2">(D ≥ 20) 1.0</td><td colspan="2"></td><td colspan="2"></td></tr> </tbody> </table>								ϕD	5	6.3	8 (L < 20)	8 (L ≥ 20)	10	12.5	16	F	2.0	2.5	3.5	3.5	5.0	5.0	7.5	ϕd	0.5	0.5	0.5	0.6	0.6	0.6	0.8	α	(L < 20) 1.5		(L ≥ 20) 2.0						β	(D < 20) 0.5		(D ≥ 20) 1.0					
ϕD	5	6.3	8 (L < 20)	8 (L ≥ 20)	10	12.5	16																																												
F	2.0	2.5	3.5	3.5	5.0	5.0	7.5																																												
ϕd	0.5	0.5	0.5	0.6	0.6	0.6	0.8																																												
α	(L < 20) 1.5		(L ≥ 20) 2.0																																																
β	(D < 20) 0.5		(D ≥ 20) 1.0																																																


RIPPLE CURRENT MULTIPLIER

Frequency Coefficient

Coefficient Cap (μF)	Freq. (Hz)	50	120	300	1k	10k~	
		≤47	0.75	1.00	1.35	1.57	2.00
68-220		0.80	1.00	1.23	1.34	1.50	
≥560		0.85	1.00	1.10	1.13	1.15	

PART NUMBER SYSTEM (EXAMPLE : 10V 47μF)

1	2 3	4 5 6	7	8 9	10	11 12	13 14
E	NH	476	M	1A	E	11	RR

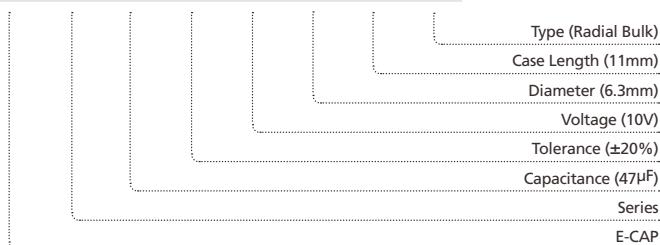

STANDARD RATINGS

Voltage (Code)		6.3V (0J)		10V (1A)		16V (1C)		25V (1E)	
Cap. (μF)	Code	Case Size	Ripple Current						
4.7	475							5 x 11	23
10	106					5 x 11	30	5 x 11	34
22	226			5 x 11	42	6.3 x 11	51	6.3 x 11	55
33	336	5 x 11	46	6.3 x 11	57	6.3 x 11	63	8 x 12	79
47	476	6.3 x 11	61	6.3 x 11	67	8 x 12	89	10 x 12.5	100
100	107	8 x 12	104	10 x 12.5	125	10 x 12.5	139	10 x 16	164
220	227	10 x 12.5	168	10 x 16	204	10 x 20	279	12.5 x 25	336
330	337	10 x 16	229	10 x 20	275	12.5 x 20	346	12.5 x 25	414
470	477	10 x 20	330	12.5 x 20	371	12.5 x 25	460	16 x 25	543
1000	108	12.5 x 25	550	16 x 25	668	16 x 25	746	16 x 30	871

Maximum Allowable Ripple Current (mA rms) at 105°C 120Hz

Case Size ϕ D x L (mm)

Voltage (Code)		35V (1V)		50V (1H)		63V (1J)		100V (2A)	
Cap. (μF)	Code	Case Size	Ripple Current						
2.2	225			5 x 11	18			6.3 x 11	22
3.3	335			5 x 11	22	6.3 x 11	26	8 x 12	32
4.7	475	5 x 11	25	6.3 x 11	29	6.3 x 11	31	8 x 12	39
10	106	6.3 x 11	40	8 x 12	51	8 x 12	53	10 x 12.5	64
22	226	8 x 12	68	10 x 12.5	82	10 x 16	96	10 x 20	114
33	336	10 x 12.5	89	10 x 16	107	10 x 20	129	12.5 x 20	164
47	476	10 x 12.5	111	10 x 20	146	10 x 20	157	12.5 x 25	200
100	107	10 x 20	196	12.5 x 25	264	12.5 x 25	275	16 x 25	304
220	227	12.5 x 25	364	16 x 25	443	16 x 30	486		
330	337	16 x 25	493	16 x 30	593				
470	477	16 x 25	586						

Maximum Allowable Ripple Current (mA rms) at 105°C 120Hz

Case Size ϕ D x L (mm)

Specifications are subject to change without notice. Should a safety or technical concern arise regarding the product, please be sure to contact our sales offices or agents immediately.